



T5 Double Parabolic Luminaires



Technical Drawing

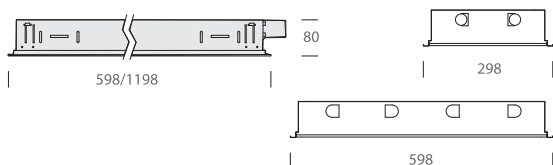

Light Distribution Curve

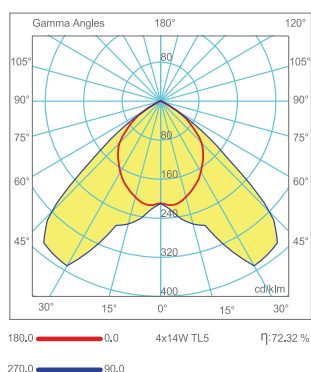

Fields of Application



Standards of Application



Product Details

Order Code (Fluorescent)	Order Code (LED Tube)	Power (W)	Lamp Type	Power Factor	Dimensions (mm) a b c	Base	Pcs/Pack	Ballast Type Options
CST 010501	CST 010113	2x14/9	TL-D	>0.95	598x298x80	G5	2	Electronic
CST 010502	CST 010114	3x14/9	TL-D	>0.95	598x598x80	G5	2	Electronic
CST 010503	CST 010115	4x14/9	TL-D	>0.95	598x598x80	G5	2	Electronic
CST 010504	CST 010116	2x28/18	TL-D	>0.95	1198x298x80	G5	2	Electronic
CST 010505	CST 010117	3x28/18	TL-D	>0.95	1198x598x80	G5	2	Electronic
CST 010506	CST 010118	4x28/18	TL-D	>0.95	1198x598x80	G5	2	Electronic

Mechanical Specifications

+ 0,50 mm thick metal frame with electrostatic powder coating. Stainless steel latches positioned to prevent falling of the framework. Ceiling tile compatible model including 4 extra brackets and screws for drywall ceiling installations

Optical Specifications

+ "anodized aluminium reflector" maintaining its optical properties, non-yellowing and non-discolouring throughout lifetime of the luminaire. Anti-glare, highly reflective lamellae.

Technical & Electrical Specifications

- Luminaires for fluorescent lamps T16 (T5) and LED Tube.
- Connection for operation on 220V-50/60Hz with electronic ballast (IT16, TC-SEL, TC-L).
- Connection for operation with electronic ballast dimmable (lamps T16, TC-SEL, TC-L).

Options

- Connection for emergency lighting system .
- Mirror or Matt Reflector

Practical Lighting Design Chart

