





Technical Drawing

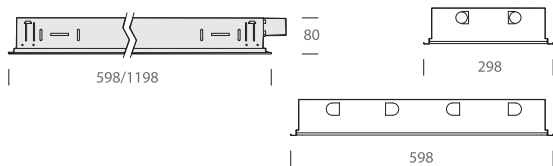

Light Distribution Curve

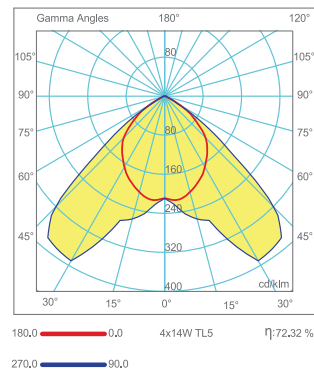

Fields of Application



Standards of Application



Product Details

Order Code (Fluorescent)	Order Code (LED Tube)	Power (W)	Lamp Type	Power Factor	Dimensions (mm) a b c	Base	Pcs/Pack	Ballast Type Options
CST 010507	CST 010119	2x14/9	TL-D	>0.95	598x298x80	G5	2	Electronic
CST 010508	CST 010120	3x14/9	TL-D	>0.95	598x598x80	G5	2	Electronic
CST 010509	CST 010121	4x14/9	TL-D	>0.95	598x598x80	G5	2	Electronic
CST 010510	CST 010122	2x28/18	TL-D	>0.95	1198x298x80	G5	2	Electronic
CST 010511	CST 010123	3x28/18	TL-D	>0.95	1198x598x80	G5	2	Electronic
CST 010512	CST 010124	4x28/18	TL-D	>0.95	1198x598x80	G5	2	Electronic

T5 Single Parabolic Luminares

Mechanical Specifications

+ 0,50 mm thick metal frame with electrostatic powder coating. Stainless steel latches positioned to prevent falling of the framework. Ceiling tile compatible model including 4 extra brackets and screws for drywall ceiling installations

Optical Specifications

+ "anodized aluminium reflector" maintaining its optical properties, non-yellowing and non-discolouring throughout lifetime of the luminaire. Anti-glare, highly reflective lamellae.

Technical & Electrical Specifications

- Luminaires for fluorescent lamps T16 (T5) and LED Tube.
- Connection for operation on 220V-50/60Hz with electronic ballast (IT16, TC-SEL, TC-L).
- Connection for operation with electronic ballast dimmable (lamps T16, TC-SEL, TC-L).

Options

- Connection for emergency lighting system .
- Mirror or Matt Reflector

