





Technical Drawing

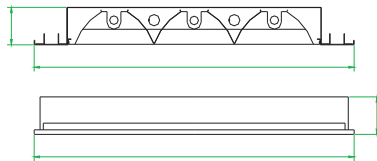

Light Distribution Curve

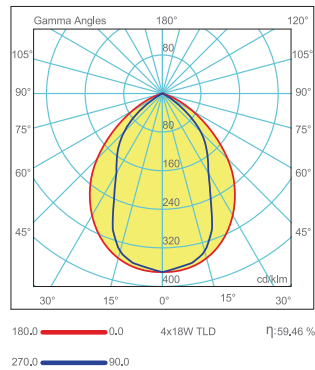

Fields of Application



Standards of Application



Product Details

Order Code (Fluorescent)	Order Code (LED Tube)	Power (W)	Lamp Type	Power Factor	Dimensions (mm) a b c	Base	Pcs/Pack	Ballast Type Options
CST 010825	CST 010167	2x18/12	TL-D	>0.95	598x298x80	G13	2	Magnetic Electronic
CST 010826	CST 010168	3x18/12	TL-D	>0.95	598x598x80	G13	2	Magnetic Electronic
CST 010827	CST 010169	2x36/24	TL-D	>0.95	1198x298x80	G13	2	Magnetic Electronic
CST 010828	CST 010170	3x36/24	TL-D	>0.95	1198x598x80	G13	2	Magnetic Electronic

T8 & LED Tube Air Slot Luminares

Mechanical Specifications

+ 0,50 mm thick metal frame with electrostatic powder coating. Stainless steel latches positioned to prevent falling of the framework. Ceiling tile compatible model including 4 extra brackets and screws for drywall ceiling installations

Optical Specifications

+ "anodized aluminium reflector" maintaining its optical properties, non-yellowing and non-discolouring throughout lifetime of the luminaire. Anti-glare, highly reflective lamellae.

Technical & Electrical Specifications

- Luminares for fluorescent & **LED** lamps T26 (T8)
- Connection for operation on 220V-50/60Hz with conventional ballast and power factor correction capacitor (lamps T26, TC-S, TC-L).
- Connection for operation on 220V-50/60Hz with electronic ballast (lamps T26).
- Connection for operation with magnetic ballast or electronic ballast dimmable (lamps T26).

Options

- Connection for emergency lighting system.
- Mirro or Matt Reflector

Practical Lighting Design Chart

