# LED & TL5-C Lamp
## Ceiling Type Luminaire





### Technical Drawing

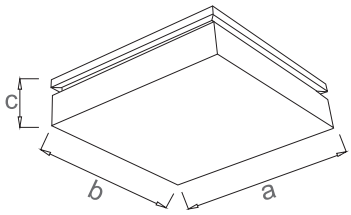


### Description :

Voltage : 220/240V
The mirror light is made by aluminum body, steel body and acrylic diffuser .
LED chip get a good and stable output Lumens.
Color : Aluminum | White PC diffuser
Beam angle : 120 °
LED : RA > 75
Color temperature: 3000K / 4000K / 5000K / 6000K
Power : 15W -22W|32W ( LED & Fluorescent)
Lifetime : LED 30000 Hours
Base : Aluminum Profile
Lumens : LED 75lms / W
Fixation : Surface

### Light Distribution Curve

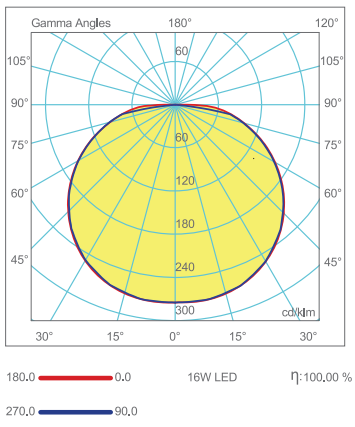




### Fields of Application



### Standards of Application




## Product Details

| Order Code | Power (W) | Current (A) | Lamp Type | Luminous Flux (lm) | Color Temperature (K) | Power Factor | Dimensions (mm) a b c | Pcs/Pack |
|---|---|---|---|---|---|---|---|---|
| CST 050101 | 15 | 0.07 | LED | 900 | 6500 | >0.95 | 290x290x90 | 12 |

## Product Details

| Order Code | Power (W) | Current (A) | Lamp Type | Luminous Flux (lm) | Power Factor | Dimensions (mm) Ø h | Base | Pcs/Pack | Ballast Type |
|---|---|---|---|---|---|---|---|---|---|
| CST 050501 | 22W | 0.16 | TL5-C | 1800 | >0.95 | 300x90 | G10q | 12 | Electronic |
| CST 040802 | 32W | 0.55 | TL5-C | 1800 + 4200 | >0.95 | 405x110 | G10q | 6 | Electronic |