


# Exit Sign Pendant Luminaires




## Technical Drawing

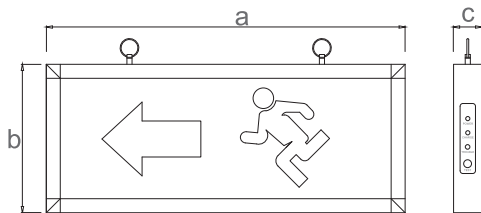

## Fields of Application



## Standards of Application



## Product Details

Order Code	Lamp Type	Working Time	Dimensions (mm) a b c	Pcs/Pack
CST 100102	LED	2 hours	360x150x24	12
CST 100103	LED	3 hours	360x150x24	12

## Descriptions

+ This energy efficient LED Exit Sign is supplied complete with SMD LED. Manufactured from a Lightweight Metal Frame and interchangeable PC Legends (Supplied as standard with Arrow Down. Optional Legends available at extra Cost). Product supplied can be used in a maintained or non maintained mode. Approx. Life 40,000 hrs.

## Optical Specifications

- + The same lamp can be installed as a recessed, semi-recessed or surface fitting.
- + The lamp features a prismatic cover and is suitable both for ceiling and wall mounting.
- + Electronics prevents appliances from over-heating. Low working temperature maximises battery life.
- + Metal housing, powder coated RAL 9006. Any other RAL and NCS colours on request.
- + Luminous flux : about 60% of mains

## Technical & Electrical Specifications

- + Mains voltage: 220V/50-60Hz  $\pm 10\%$
- + CE label and in conformity with EN standards. Lamp with individual battery
- + Battery: Maintenance-free Ni/Cd , 2h or 3h
- + Recharge time: 90% of capacity in 20 hours
- + Battery: Nickel cadmium 2.4V 4.8Ah
- + Charge Time: 24 hours recharging time

## Options

- + Mounted : Recessed, surface wall and ceiling mounted
- + Lamps 1x T5 8W Fluorescent lamp 2.4V4500mAh Ni-Cd batteries pack
- + SMD LED lamp 4.8V1800mAh Ni-Cd batteries pack

## Legend

EXIT	/ E
EXIT ►	/ R
◀EXIT	/ L
EXIT	/ O
EXIT ►	/ SR
◀EXIT	/ TL