355° IP44

Recessed Round LED Downlight



PRODUCT PROFILE

Order Code	Lumen	Power	Dimensions	Beam Angle	CRI
CST_RRLD 0069070	600lm	6W	90/C75mm	120°	Ra≥80
CST_RRLD 12121100	1200lm	12W	122/C110mm	120°	Ra≥80
CST_RRLD 18172148	1800lm	18W	172/C158mm	120°	Ra≥80
CST_RRLD 24225200	2400lm	24W	225/C210mm	120°	Ra≥80

SMD | >.95 PF | 50.000h | 220V 240V Voltage | K CCT



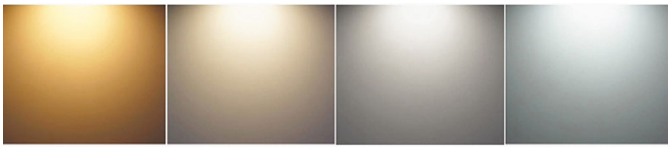

3000K - 3500K | 4000K - 4500K | 5000K - 5500K | 6000K - 6500K

Optional LED Chip Brands

EPISTAR PHILIPS OSRAM NICHIA BRIDGELUX CREE

Standards

Application

MEETING HALLS | OFFICES | SCHOOLS | HOSPITALS | MARKETS | HOUSES | STAIRS | SHOPPING CENTERS

Product Features

+ Using high lumen SMD light source high intensity aluminum shell,fast heating.
+ Using good reflectivity super thin, super bright LGP which make the lights more equally.
+ Low voltage and constant current driver, no glare the light is soft.
+ Launch in 0.01sec, no flashing, no noise, no radiation. Energy saving,and environmental.
+ This product can show high brightness, without seeing the lamp itself.
+ High energy saving in relation to FLC sources
+ Long operating life to optimise maintenance
+ Materials : Powder coating aluminum.

Technical Drawing







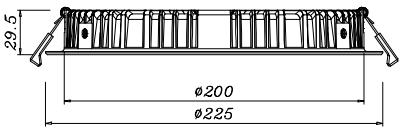

Photometric Data

