

Recessed Round LED Down Light



PRODCT PROFILE

Order Code	Lumen	Power	Voltage	Dimensions	CRI
CST_RLDL 07095075	686lm	7W	220-240V	95*C75 mm	Ra≥90
CST_RLDL 10113095	980lm	10W	220-240V	113*C95 mm	Ra≥90
CST_RLDL 12113095	1176lm	12W	220-240V	113*C95 mm	Ra≥90
CST_RLDL 14145125	1372lm	14W	220-240V	145*C125mm	Ra≥90
CST_RLDL 17145125	1660lm	17W	220-240V	145*C125 mm	Ra≥90
CST_RLDL 20174150	1960lm	20W	220-240V	174*C150 mm	Ra≥90

Optional LED Chip Brands

EPISTAR PHILIPS OSRAM NICHIA BRIDGELUX CREE

Standards

Application







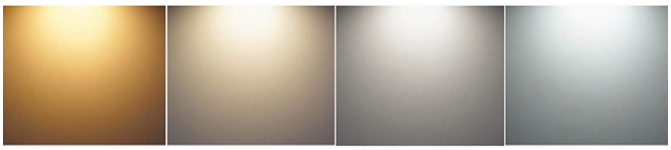

Product Features

- Body of the luminaire is made of aluminium
- Patented heat outlet for long lifespan to optimise maintenance
- High quality COB chips & High luminous efficacy
- 60% - 80% energy saving in relation to halogen& CFL sources
- Replacement to halogen or CFL downlights
- Excellent light spot, comfortable to eyes, no flicker, no strobe.
- Environmental friendly, No UV or IR radiation, no noise.
- High CRI more than 80, approximate to the nature light.

Technical Drawing



Photometric Data

