




# Surface Square LED Down Light



## PRODUCT PROFILE

Order Code	Lumen	Power	Voltage	Beam Angle	CRI
CST_SLDL 00109090	1100lm	10W	220-240V	60°	Ra≥90
CST_SLPL 20110120	2200lm	20W	220-240V	60°	Ra≥90
CST_SLPL 30130130	3300lm	30W	220-240V	60°	Ra≥90
CST_SLPL 40160160	4400lm	40W	220-240V	60°	Ra≥90

### Optional LED Chip Brands

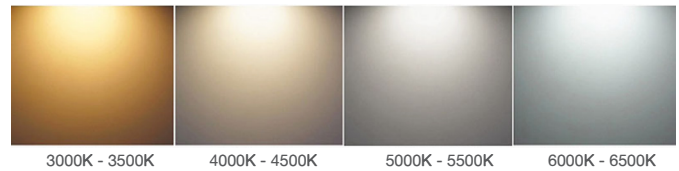

### Standards




### Application



### Product Features

- Body of the luminaire is made of aluminium
- Patented heat outlet for long lifespan to optimise maintenance
- High quality COB chips & High luminous efficacy
- 60% - 80% energy saving in relation to halogen& CFL sources
- Replacement to halogen or CFL downlights
- Excellent light spot, comfortable to eyes, no flicker, no strobe.
- Environmental friendly, No UV or IR radiation, no noise.
- High CRI more than 80, approximate to the nature light.

### Technical Drawing

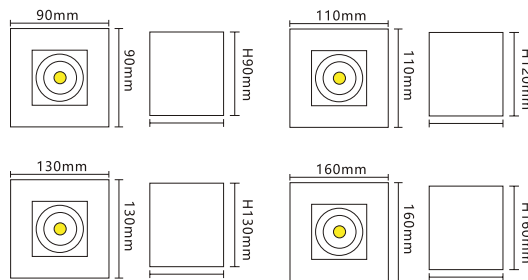

### Photometric Data

