
355° IP44

LED Down Light




PRODCT PROFILE

Order Code	Lumen	Power	Voltage	Beam Angle	CCT	CRI
CST_LDL 10165150	1100lm	10W	220-240V	24/38/60°	3000K/4000K	Ra≥90
CST_LDL 20190175	2200lm	20W	220-240V	24/38/60°	3000K/4000K	Ra≥90
CST_LDL 30225205	3300lm	30W	220-240V	24/38/60°	3000K/4000K	Ra≥90







Optional LED Chip Brands

EPISTAR PHILIPS
OSRAM NICHIA
BRIDGELUX CREE

Standards


Application



Product Features

- Body of the luminaire is made of aluminium
- Patented heat outlet for long lifespan to optimise maintenance
- High quality COB chips & High luminous efficacy
- 60% - 80% energy saving in relation to halogen& CFL sources
- Replacement to halogen or CFL downlights
- Excellent light spot, comfortable to eyes, no flicker, no strobe.
- Environmental friendly, No UV or IR radiation, no noise.
- High CRI more than 80, approximate to the nature light.

Technical Drawing

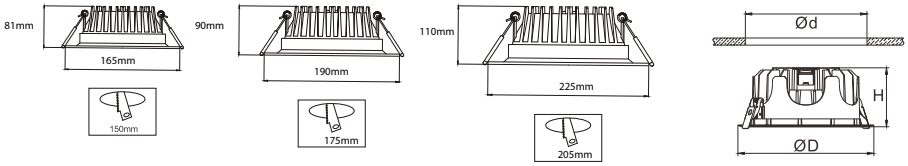

Photometric Data

