LED Recessed Grille Light



- Optional LED Chip Brands

EPISTAR PHILIPS OSRAM NICHIA BRIDGELUX CREE

- Standards





- Application



PRODCT PROFILE

Order Code	Lumen	Power	Voltage	Beam Angle	CCT	CRI
CST_LRGL 15116105	1650lm	15W	220–240V	15/24/38°	3000K/4000K	Ra≥90
CST_LRGL 20160140	2200lm	20W	220–240V	15/24/38°	3000K/4000K	Ra≥90
CST_LRGL 30176160	3300lm	30W	220–240V	15/24/38°	3000K/4000K	Ra≥90





Technical Drawing



Product Features

- Body of the luminaire is made of aluminium
- Patented heat outlet for long lifespan to optimise maintenance
- High quality COB chips & High luminous efficacy
- 60% - 80% energy saving in relation to halogen& CFL sources
- Replacement to halogen or CFL downlights
- Excellent light spot, comfortable to eyes, no flicker, no strobe.
- Environmental friendly, No UV or IR radiation, no noise.
- High CRI more than 80, approximate to the nature light.

PRODCT PROFILE

Order Code	Lumen	Power	Voltage	Beam Angle	CCT	CRI
CST_LRGL 215116200	3300lm	2*15W	220–240V	15/24/38°	3000K/4000K	Ra≥90
CST_LRGL 220290270	4400lm	2*20W	220–240V	15/24/38°	3000K/4000K	Ra≥90
CST_LRGL 230325310	6600lm	2*30W	220–240V	15/24/38°	3000K/4000K	Ra≥90





Technical Drawing

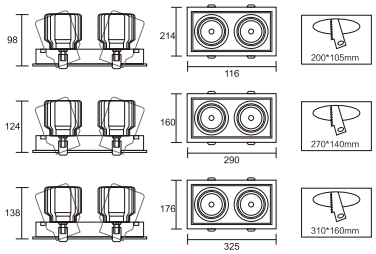

Product Features

- Body of the luminaire is made of aluminium
- Patented heat outlet for long lifespan to optimise maintenance
- High quality COB chips & High luminous efficacy
- 60% - 80% energy saving in relation to halogen& CFL sources
- Replacement to halogen or CFL downlights
- Excellent light spot, comfortable to eyes, no flicker, no strobe.
- Environmental friendly, No UV or IR radiation, no noise.
- High CRI more than 80, approximate to the nature light.