

LED Recessed Grille Light



PRODCT PROFILE

Order Code	Lumen	Power	Voltage	Beam Angle	CCT	CRI
CST_LRGL 10118100	1100lm	1*10W	220-240V	15/24/38°	3000K/4000K	Ra≥90







Technical Drawing



Photometric Data

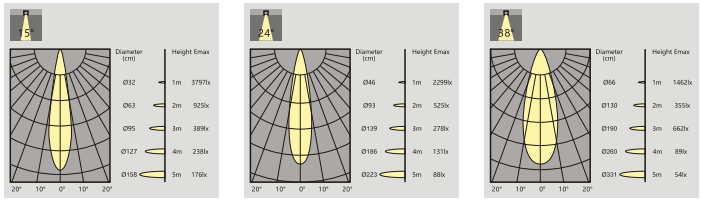

- Optional LED Chip Brands

EPISTAR PHILIPS
OSRAM NICHIA
BRIDGELUX CREE

- Standards





- Application



PRODCT PROFILE

Order Code	Lumen	Power	Voltage	Beam Angle	CCT	CRI
CST_LRGL 210222205	2200lm	2*10W	220-240V	15/24/38°	3000K/4000K	Ra≥90





Technical Drawing

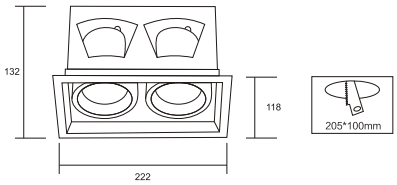

Product Features

- Body of the luminaire is made of aluminium
- Patented heat outlet for long lifespan to optimise maintenance
- High quality COB chips & High luminous efficacy
- 60% - 80% energy saving in relation to halogen& CFL sources
- Replacement to halogen or CFL downlights
- Excellent light spot, comfortable to eyes, no flicker, no strobe.
- Environmental friendly, No UV or IR radiation, no noise.
- High CRI more than 80, approximate to the nature light.

Photometric Data

