355° IP44

LED Recessed Grille Light



PRODCT PROFILE

Order Code	Lumen	Power	Voltage	Beam Angle	CCT	CRI
CST_LRGL 310306290	3300lm	3*10W	220–240V	15/24/38°	3000K/4000K	Ra≥90

COB | >.95 PF | 50.000h | 220V 240V Voltage



Technical Drawing

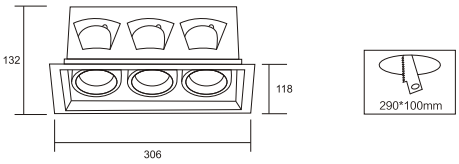

Product Features

- Body of the luminaire is made of aluminium
- Patented heat outlet for long lifespan to optimise maintenance
- High quality COB chips & High luminous efficacy
- 60% - 80% energy saving in relation to halogen& CFL sources
- Replacement to halogen or CFL downlights
- Excellent light spot, comfortable to eyes, no flicker, no strobe.
- Environmental friendly, No UV or IR radiation, no noise.
- High CRI more than 80, approximate to the nature light.

Photometric Data

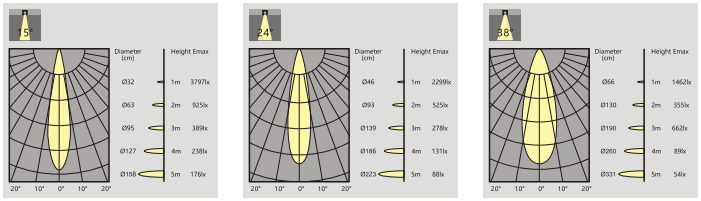

Optional LED Chip Brands

EPISTAR PHILIPS OSRAM NICHIA BRIDGELUX CREE

Standards

DLC LISTED FC SAA CE TÜV GS RoHS



PRODCT PROFILE

Order Code	Lumen	Power	Voltage	Beam Angle	CCT	CRI
CST_LRGL 52147140	1100lm	5*2W	220–240V	15/30/45°	3000K/4000K	Ra≥90

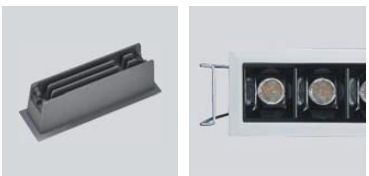

Technical Drawing





Application

