
LED Recessed Grille Light



- Optional LED Chip Brands

EPISTAR PHILIPS OSRAM NICHIA BRIDGELUX CREE


- Standards

PRODCT PROFILE

Order Code	Lumen	Power	Voltage	Beam Angle	CCT	CRI
CST_LRGL 102280273	2200lm	10*2W	220-240V	15/30/45°	3000K/4000K	Ra≥90




Technical Drawing

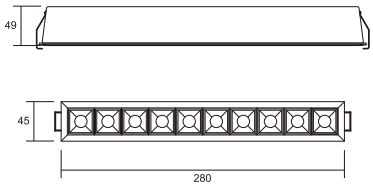

Product Features

- Body of the luminaire is made of aluminium
- Patented heat outlet for long lifespan to optimise maintenance
- High quality COB chips & High luminous efficacy
- 60% - 80% energy saving in relation to halogen& CFL sources
- Replacement to halogen or CFL downlights
- Excellent light spot, comfortable to eyes, no flicker, no strobe.
- Environmental friendly, No UV or IR radiation, no noise.
- High CRI more than 80, approximate to the nature light.



- Application

MEETING HALLS OFFICES SCHOOLS HOSPITALS MARKETS HOUSES STAIRS SHOPPING CENTERS

PRODCT PROFILE

Order Code	Lumen	Power	Voltage	Beam Angle	CCT	CRI
CST_LRGL 152412405	3300lm	15*2W	220-240V	15/30/45°	3000K/4000K	Ra≥90



COB >.95 PF 50.000h 220V 240V Voltage

Technical Drawing

