LED Track Light



PRODCT PROFILE


Order Code	Lumen	Power	Voltage	Beam Angle	CCT	CRI
CST_LTL 01512860	1650lm	15W	220-240V	15°/24°/36°	3000K/4000K	Ra≥90
CST_LTL 02513670	2750lm	25W	220-240V	15°/24°/36°	3000K/4000K	Ra≥90
CST_LTL 03513685	3850lm	35W	220-240V	15°/24°/36°	3000K/4000K	Ra≥90


SMD | >.95 PF | 50.000h | 220V 240V Voltage





Technical Drawing

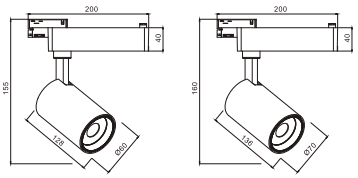



Optional LED Chip Brands


EPISTAR PHILIPS
OSRAM NICHIA
BRIDGELUX CREE


Product Features

- Body of the luminaire is made of aluminium
- Patented heat outlet for long lifespan to optimise maintenance
- High quality COB chips & High luminous efficacy
- 60% - 80% energy saving in relation to halogen& CFL sources
- Replacement to halogen or CFL downlights
- Excellent light spot, comfortable to eyes, no flicker, no strobe.
- Environmental friendly, No UV or IR radiation, no noise.
- High CRI more than 80, approximate to the nature light.


Standards


Photometric Data

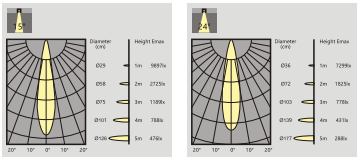





Photometric Data

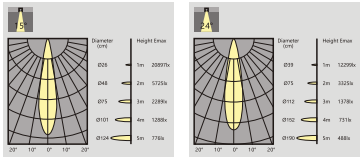



Photometric Data

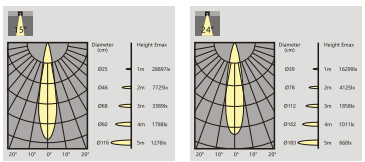



Application

