LED Ceiling Light Luminaire



PRODUCT PROFILE

Order Code	Lumen	Power	Dimensions	Beam Angle	CRI
CST_LCLL 01662546/A	1280m	16W	625*146*46mm	120°	Ra≥80
CST_LCLL 32122546/A	2560lm	32W	1225*146*46mm	120°	Ra≥80
CST_LCLL 01660039/B	1280lm	16W	600*120*39mm	120°	Ra≥80
CST_LCLL 32120039/B	2560lm	32W	1200*120*39mm	120°	Ra≥80

- Optional LED Chip Brands

EPISTAR PHILIPS OSRAM NICHIA BRIDGELUX CREE

- Standards



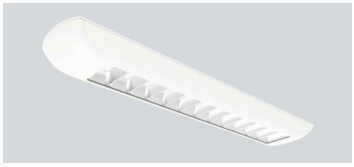

Technical Drawing



PC Cover

Product Features

- Body of the luminaire is made by aluminium & PC
- Patented heat outlet for long lifespan to optimise maintenance
- High quality SMD chips & High luminous efficacy
- High energy saving compare with fluorescent source
- Excellent light, comfortable to eyes, no flicker, no strobe.
- Environmental friendly, No UV or IR radiation, no noise.
- High CRI more than 80, approximate to the nature light.



Alu Reflector



PRODUCT PROFILE

Order Code	Lumen	Power	Dimensions	Beam Angle	CRI
CST_LCLL 01030030	800lm	10W	300*75*30mm	120°	Ra≥80
CST_LCLL 02060030	1600lm	20W	600*75*30mm	120°	Ra≥80
CST_LCLL 03090030	2400lm	30W	900*75*30mm	120°	Ra≥80
CST_LCLL 40120030	3200lm	40W	1200*75*30mm	120°	Ra≥80

- Application







Product Features

- Body of the luminaire is made by aluminium & PC
- Patented heat outlet for long lifespan to optimise maintenance
- High quality SMD chips & High luminous efficacy
- High energy saving compare with fluorescent source
- Excellent light, comfortable to eyes, no flicker, no strobe.
- Environmental friendly, No UV or IR radiation, no noise.
- High CRI more than 80, approximate to the nature light.

Technical Drawing

