LED UFO Highbay Luminaire




PRODUCT PROFILE

Order Code	Lumen	Power	Dimensions	Beam Angle	CRI
CST_UHL 100360128	12000lm	100W	360*128mm	120°	Ra≥80
CST_UHL 120360128	14400lm	120W	360*128mm	120°	Ra≥80
CST_UHL 150360128	18000lm	150W	360*128mm	120°	Ra≥80
CST_UHL 180420146	21600lm	180W	420*146mm	120°	Ra≥80
CST_UHL 200420146	24000lm	200W	420*146mm	120°	Ra≥80
CST_UHL 230420146	27600lm	230W	420*146mm	120°	Ra≥80

SMD | >.95 PF | 50.000h | 220V 240V Voltage | K CCT



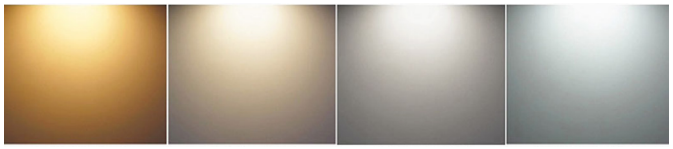

3000K - 3500K | 4000K - 4500K | 5000K - 5500K | 6000K - 6500K

Optional LED Chip Brands

EPISTAR PHILIPS OSRAM NICHIA BRIDGELUX CREE

Standards


Application


PLANTS WORKSHOPS | INDUSTRIAL PLANTS | STORES | STADIUMS | WAREHOUSES | MARKETS | SHOPPING CENTERS

Features

High power, excellent quality.
High CRI up to 80-95. Light efficiency up to 120-180lm/w.
2-5 times bright than traditional light.
50-70% cost reduction compared to HP sodium, Metal halide or Mercury lamp.
High quality and most of companies difficult achieve a true 95% of high-efficiency lens.
No flickering, No RF interference, No UV radiation,No mercury.
Low heat emission, Good heat dissipation, Super bright illumination.
Die-cast Aluminum fixture with Electrophoretic paint coating
Designed with Corrosion resistance and dust proof

Technical Drawing



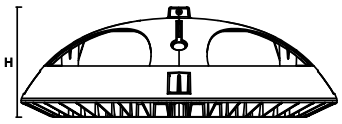

Photometric Data

