LED Highbay Luminaire




PRODUCT PROFILE

Order Code	Lumen	Power	Dimensions	Beam Angle	CRI
CST_LBL 100320273	13000lm	100W	320*273mm	60-70-90-120°	Ra≥80
CST_LBL 120320273	15600lm	120W	320*273mm	60-70-90-120°	Ra≥80
CST_LBL 150320273	19500lm	150W	320*273mm	60-70-90-120°	Ra≥80
CST_LBL 200400295	26000lm	200W	400*295mm	60-70-90-120°	Ra≥80
CST_LBL 230400295	29900lm	230W	400*295mm	60-70-90-120°	Ra≥80

COB | >.95 PF | 50.000h | 220V 240V Voltage | K CCT



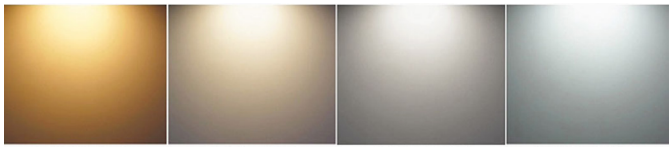

3000K - 3500K | 4000K - 4500K | 5000K - 5500K | 6000K - 6500K

Optional LED Chip Brands

EPISTAR PHILIPS OSRAM NICHIA BRIDGELUX CREE

Standards

Products Features

High power, excellent quality.
High CRI up to 80-95. Light efficiency up to 120-180lm/w.
2-5 times bright than traditional light.
50-70% cost reduction compared to HP sodium, Metal halide or Mercury lamp.
High quality and most of companies difficult achieve a true 95% of high-efficiency lens.
No flickering, No RF interference, No UV radiation,No mercury.
Low heat emission, Good heat dissipation, Super bright illumination.
Die-cast Aluminum fixture with Electrophoretic paint coating
Designed with Corrosion resistance and dust proof

Application

PLANTS WORKSHOPS | INDUSTRIAL PLANTS | STORES | STADIUMS | WAREHOUSES | MARKETS | SHOPPING CENTERS

Technical Drawing

