LED Reflector Hibay Luminaire

PRODUCT PROFILE

Order Code	Lumen	Power	Dimensions	Beam Angle	CRI
CST_RHL 100350320	12000lm	100W	350*320mm	90°	Ra≥80
CST_RHL 120350320	14400lm	120W	350*320mm	90°	Ra≥80
CST_RHL 150430405	18000lm	150W	430*405mm	90°	Ra≥80
CST_RHL 180430405	21600lm	180W	430*405mm	90°	Ra≥80
CST_RHL 200430405	24000lm	200W	430*405mm	90°	Ra≥80
CST_RHL 240430405	28800lm	240W	430*405mm	90°	Ra≥80




- Optional LED Chip Brands


EPISTAR PHILIPS OSRAM NICHIA BRIDGELUX CREE

- Standards

- Application

PLANTS WORKSHOPS · INDUSTRIAL PLANTS · STORES · STADIUMS · WAREHOUSES · MARKETS · SHOPPING CENTERS



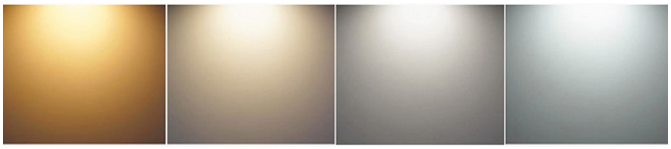

3000K - 3500K | 4000K - 4500K | 5000K - 5500K | 6000K - 6500K

Products Features

High power, excellent quality.
High CRI up to 80-95. Light efficiency up to 120-180lm/w.
2-5 times bright than traditional light.
50-70% cost reduction compared to HP sodium, Metal halide or Mercury lamp.
High quality and most of companies difficult achieve a true 95% of high-efficiency lens.
No flickering, No RF interference, No UV radiation,No mercury.
Low heat emission, Good heat dissipation, Super bright illumination.
Die-cast Aluminum fixture with Electrophoretic paint coating
Designed with Corrosion resistance and dust proof

Photometric Data

