LED Reflector Hibay Luminaire



PRODUCT PROFILE

Order Code	Lumen	Power	Dimensions	Beam Angle	CRI
CST_RHL 100500250	11000lm	100W	500*h250mm	60-70-90-120°	Ra≥80
CST_RHL 150500290	16500lm	150W	500*h290mm	60-70-90-120°	Ra≥80
CST_RHL 200500290	22000lm	200W	500*h290mm	60-70-90-120°	Ra≥80
CST_RHL 300580340	33000lm	300W	580*h340mm	60-70-90-120°	Ra≥80

COB | >.95 PF | 50.000h | 220V 240V Voltage | K CCT

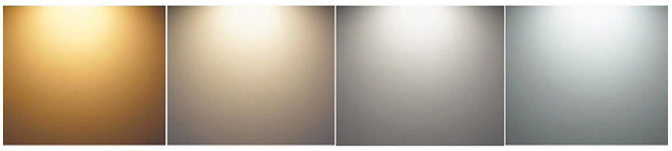

3000K - 3500K | 4000K - 4500K | 5000K - 5500K | 6000K - 6500K









Optional LED Chip Brands

EPISTAR PHILIPS
OSRAM NICHIA
BRIDGELUX CREE

Standards

Products Features

High power, excellent quality.
High CRI up to 80-95. Light efficiency up to 120-180lm/w.
3-5 times bright than traditional light.
50-70% cost reduction compared to HP sodium, Metal halide or Mercury lamp.
High quality and most of companies difficult achieve a true 95% of high-efficiency lens.
No flickering, No RF interference, No UV radiation,No mercury.
Low heat emission, Good heat dissipation, Super bright illumination.
Aluminum fixture with Electrophoretic paint coating

Application

PLANTS WORKSHOPS | INDUSTRIAL PLANTS
STORES | STADIUMS
WAREHOUSES | MARKETS
SHOPPING CENTERS

Technical Drawing







Photometric Data

