LED Flood Light

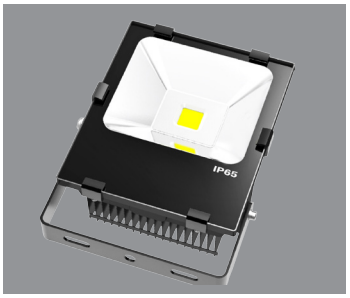

PRODUCT PROFILE

Order Code	Lumen	Power	Dimensions	Beam Angle	CRI
CST_LFL 05027565	5500lm	50W	L275*W228*h65	120°	Ra≥80
CST_LFL 10034078	11000lm	100W	L340*W278*h78	120°	Ra≥80
CST_LFL 15041085	16500lm	150W	L410*W325*h85	120°	Ra≥80
CST_LFL 200390128	22000lm	200W	L390*W335*h128	120°	Ra≥80

Optional LED Chip Brands

EPISTAR PHILIPS OSRAM NICHIA BRIDGELUX CREE

Standards

Application

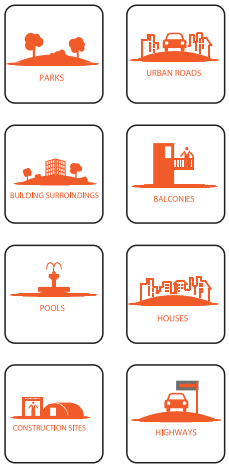





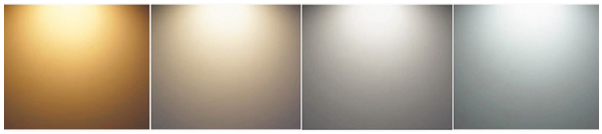

Features

High power, excellent quality.
High CRI up to 80-95.Light efficiency up to 110-150lm/w.
Energy saving LED fLood Lights
Die-cast Aluminum fixture with electrophoretic paint coating
Designed with corrosion resistance and dust proof
High power LED chips, high lumen efficiency
Patented HDT technology, patented zipped-fins technology
Excellent in heat dissipation and thermal management
Tempered glass lens; mounting option- bracket.
Environment friendly, No UV/radiation, No lead or Mercury

Technical Drawing



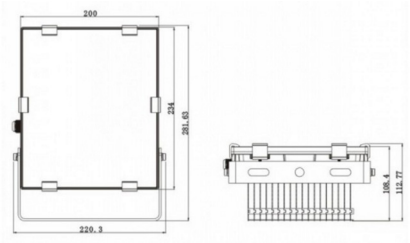

Photometric Data

