


LED Flood Light



PRODUCT PROFILE

Order Code	Lumen	Power	Dimensions	Beam Angle	CRI
CST_LFL 300290194	36000lm	300W	L290*W603*h194	15°/30°/60°	Ra≥80
CST_LFL 480441194	57600lm	480W	L441*W603*h194	15°/30°/60°	Ra≥80
CST_LFL 500441194	60000lm	500W	L441*W603*h194	15°/30°/60°	Ra≥80
CST_LFL 960740194	115200lm	960W	L740*W603*h194	15°/30°/60°	Ra≥80
CST_LFL 1000740194	120000lm	1000W	L740*W603*h194	15°/30°/60°	Ra≥80




Optional LED Chip Brands


EPISTAR PHILIPS
OSRAM NICHIA
BRIDGELUX CREE

Standards

Application

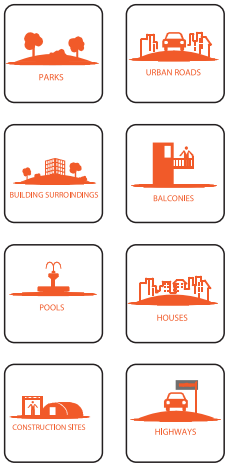




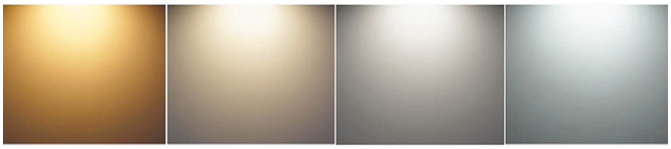


Features

High power, excellent quality.
High CRI up to 80-95.Light efficiency up to 110-150lm/w.
Energy saving LED fLood Lights
Die-cast Aluminum fixture with electrophoretic paint coating
Designed with corrosion resistance and dust proof
High power LED chips, high lumen efficiency
Patented HDT technology, patented zipped-fins technology
Excellent in heat dissipation and thermal management
Tempered glass lens; mounting option- bracket.
Environment friendly, No UV/radiation, No lead or Mercury

Technical Drawing







Photometric Data

