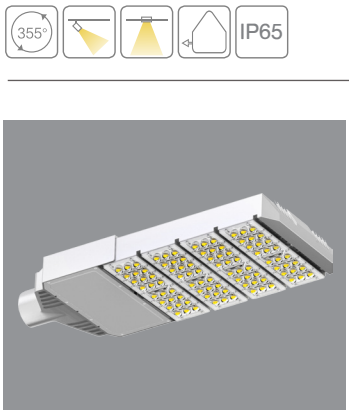

LED Street Light

PRODUCT PROFILE

Order Code	Lumen	Power	Dimensions	Beam Angle	CRI
CST_LSL 100665131	11000lm	100W	L665*W317*h131	60°/90°/120°	Ra≥80
CST_LFL 120757131	13200lm	120W	L757*W317*h131	60°/90°/120°	Ra≥80
CST_LFL 150849131	16500lm	150W	L849*W317*h131	60°/90°/120°	Ra≥80

SMD | >.95 PF | 50.000h | 220V 240V Voltage | K CCT



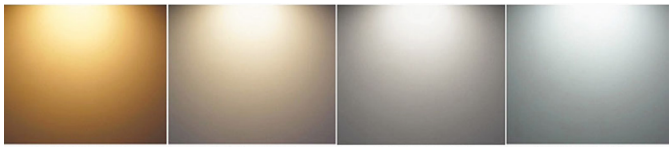

3000K - 3500K | 4000K - 4500K | 5000K - 5500K | 6000K - 6500K

Optional LED Chip Brands

EPISTAR PHILIPS OSRAM NICHIA BRIDGELUX CREE

Standards

Features

High power, excellent quality.
High CRI up to 80-95.Light efficiency up to 110-150lm/w.
Energy saving LED fLood Lights
Die-cast Aluminum fixture with electrophoretic paint coating
Designed with corrosion resistance and dust proof
High power LED chips, high lumen efficiency
Patented HDT technology, patented zipped-fins technology
Excellent in heat dissipation and thermal management
Tempered glass lens; mounting option- bracket.
Environment friendly, No UV/radiation, No lead or Mercury

Technical Drawing

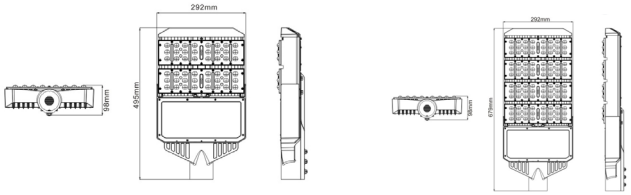

Application

PARKS | URBAN ROADS | BUILDING SURROUNDINGS | BALCONIES | POOLS | HOUSES | CONSTRUCTION SITES | HIGHWAYS

Photometric Data

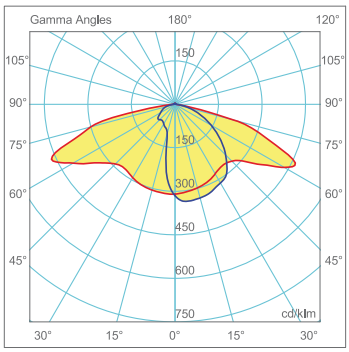

180.0 — 0.0 26W LED η:100%
270.0 — 90.0

Isolux Diagram*

